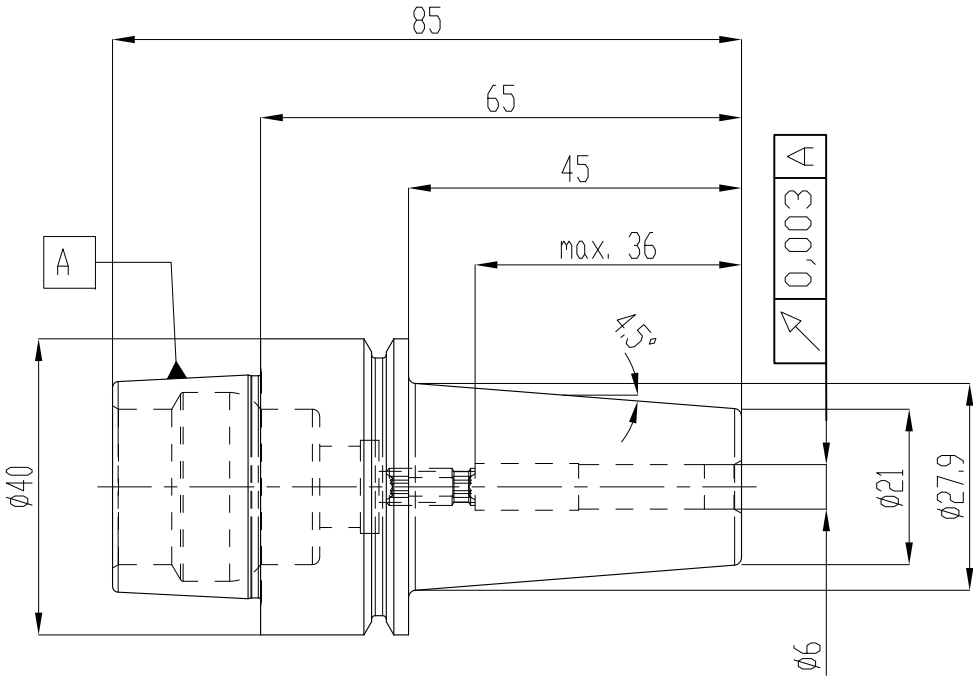



$\Delta$ 

Laengennachstellung length adjustment	N = 10 mm	
Restunwucht residual imbalance	U < 1gmm	fuer Futtermasse < 1kg for chuck mass < 1kg
Wuchtguete balance quality	G2,5 25000 1/min	fuer Futtermasse >= 1kg for chuck mass >= 1kg
Kuehlmitteldurchfuehrung coolant feed	zentral central	
Kuehlmitteldruck coolant pressure	max. 50 bar	
Erwaermungstemperatur heating temperature	max. 350 °C	
schrumpfbare Schafttoleranz shrinkable shank tolerance	h6 / ISO286	

technische Änderungen vorbehalten / subject to technical alterations					Gewicht/weight=		
Schutzvermerk ISO 16016 beachten / refer to protection notice ISO 16016							
		Maßstab scale		A3	Datum	Name	
		1:1		Konst.	09.02.17	S.Digel	
9				Gez.	09.02.17	A.Volk	
8				Gepr.			
7				Spannfutter System ThermoGrip Clamping chuck ThermoGrip system			
6							
5							
4							
3							
2				Ident Nr.		Bezeichnung / designation	
1				6726626		T0600-65/HSK-E40	
Nr. no.	Änderung change		Datum date	Name		Blatt sheet 1/1	